




Fastflex **fast action industrial doors** are our market leading access solution available as internal or external fold and roller access solutions. With a range of features and benefits to satisfy all requirements, **use as an integrated solution** with our partitioning and structure systems.



External or Internal Use




For use as an Integrated Solution



Wide Range of Options

Features and Benefits

Door assembly includes quality GFA drive train and control gear*	<ul style="list-style-type: none"> • Reduced breakdowns and failures; parts available fast in the event of damage
Doors pre-assembled and tested before leaving the factory	<ul style="list-style-type: none"> • Quality assured; quick, seamless on-site installation process
Anti-crash system self-repairs	<ul style="list-style-type: none"> • Reduce operational downtime and repair costs in the event of impact
Custom-made sizes available, up to 15m wide	<ul style="list-style-type: none"> • Freedom to replace existing doors or create new bespoke openings
Range of operation options including radar, photo cell and push button	<ul style="list-style-type: none"> • Our Westgate specialists can advise on a system that works for your traffic flow and budget
Safety light curtain	<ul style="list-style-type: none"> • Up to 2.5m from the floor to ensure the door stops if goods or personnel are in the doorway opening
A range of solutions to suit your business needs	<ul style="list-style-type: none"> • Thermal, Acoustic, Antistatic, Hermetic and Food Industry Approved solutions • Range of coloured material and vision panel options • Internal and external doors available
Wind loads	<ul style="list-style-type: none"> • Doors achieve Wind Class 2 as standard. • Solutions available under request to deliver Wind Class 4 compliance. • Fastflex doors typically achieve higher Wind Class ratings (relative to door size) than other systems on the market.
National installation service	<ul style="list-style-type: none"> • Receive certified and professional installation wherever your location
Repair and maintenance service	<ul style="list-style-type: none"> • Call on us for professional service or repair
Designed and installed as part of a partitioning and structure installation	<ul style="list-style-type: none"> • Integrated solution from a single supplier creating streamlined project delivery

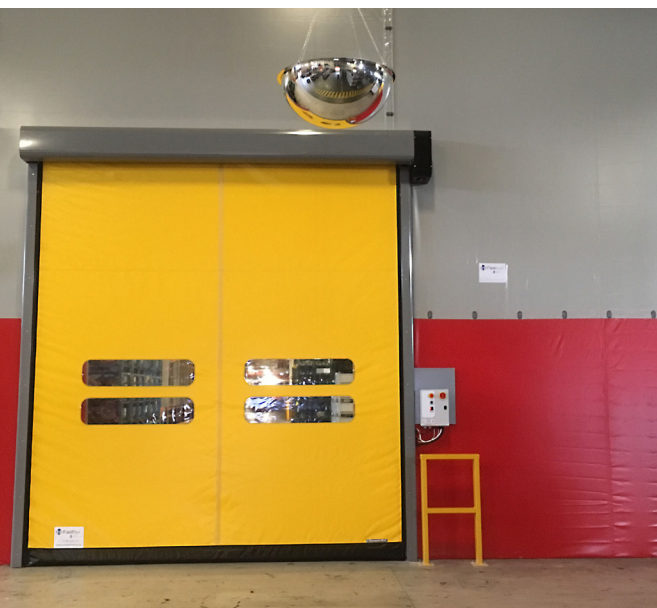

Technical Specifications

Max Door Size Internal	9m(w) x 7m(h) (fold door) 5m(w) x 5(m) (roller door)
Max Door Size External	6m(w) x 6m(h) (fold door) 5m(w) x 5(m) (roller door)
Opening Speeds	up to 2.5 m/s (Internal) up to 1.5 m/s (External)
Closing Speeds	up to 0.8 m/s (Internal) up to 0.8 m/s (External)
Safety Bottom Edge Protection	yes
Safety Light Curtain	yes (up to 2.5m)
Self-Repairing Zip Edge	Roller door only
Drive Train/Control Gear	Motor IP54 rated, Control box IP65 rated
Frame	Galvanized (EN 10346:2009) or powder coated steel guide rails, curtain hood and motor cover (316 grade stainless steel option).
Door Blade	Heavy duty 950gsm polyester reinforced PVC coated fabric Available in standard colours: Grey (RAL9006) and Blue (RAL5005). Other colours available on request. Vision panels – transparent PVC 1mm thick
Operation Options	Photocells for safety and actuation, Light curtain safety, Radio transmitter actuation, Radar safety and actuation, Induction loop, Pull cord, Push button, Proximity reader
Electricity Supply	Single phase or 3 phase (depending on door size)
Guarantee	12 months parts and 6 months labour**

Full specifications can be provided on request.

*unless specified otherwise. **subject to usual conditions and exclusions.

This fact sheet is for illustrative purposes only and based on the latest information at the time of print. Installation methods may vary depending on specific project requirements.

Westgate Global reserve the right to make changes at any time without notice

J454-WFD-PFS-FC-010323 © Westgate Global Ltd