



Fastwall is a **seamless mobile factory segregation system**, hygienically designed with no food or water traps and used in multiples to create a line of protection. **Designed to reduce the risk of cross contamination**, contain overspray, protect machinery, products and employees, create washrooms and temporary packing areas. A **robust solution** for hygiene, allergen, personnel, maintenance and compliance issues.



Prevent Cross Contamination



Protect Employees




Quick to Deploy



Hygienic Design - Prevents Ingress




Antibacterial Materials



Compact Storage

Features and Benefits

Mobile and lightweight	<ul style="list-style-type: none"> • Quick-to-deploy - minimal impact to existing production schedules • Push-and-go connecting mechanism with magnetic seam - join screens in seconds • Rapid, tool-free assembly - no need for permanent fixings • Configure to any path around equipment and personnel - up to 300 degrees of travel • Easy to move when assembled and easy to disassemble and store • Can easily nest when not in use or breakdown for storage
Hygienic and modular design	<ul style="list-style-type: none"> • Segregate production lines for washdown processes • Create quick-to-deploy washdown areas • Create temporary packing areas • Create mobile washrooms • Works in any environment • Use in areas where regular cleaning is required and overspray needs to be contained • Curtains can be washed down in dusty environments
Antibacterial materials	<ul style="list-style-type: none"> • Manufactured from PVC material with no stitching • Stainless steel frame, seamlessly welded • Prevents wet and dry product ingress • Suitable for companies adhering to BRC
Optional extras	<ul style="list-style-type: none"> • Incorporate vision panels for additional health and safety measures • Available in four colours; red, green, yellow and blue

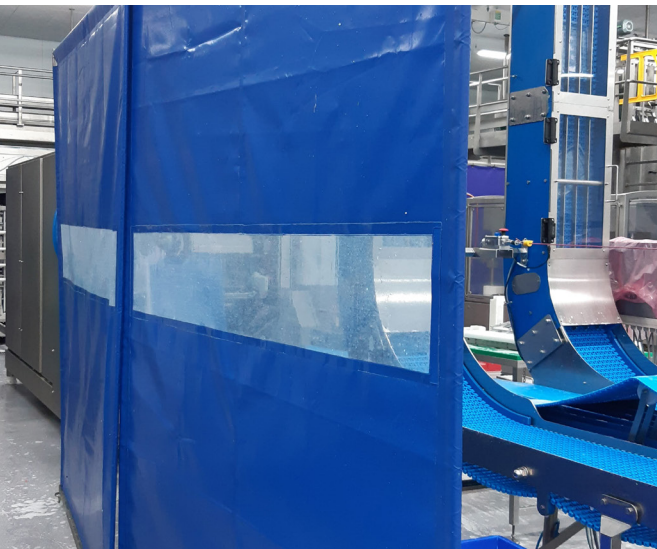

Technical Specifications

Material Composite (cover):	High tenacity polyester – flexible plasticised PVC coating on both sides
Material Composite (frame):	<ul style="list-style-type: none"> • 304 Grade stainless steel frame comprising 10mm thick base plate & 3/4" OD x 1.5mm uprights and cross bar • 304 Grade stainless steel fixings and fastenings • 304 Grade heavy duty stainless steel castors with food grade, nylon, non-marking, locking wheels
Material Weight:	610g/m ² (+/- 25g/m ²)
Heat rRsistance of Fabric:	Up to 70 degrees Celsius
Flame rRtardant Properties:	BS5867 Part 2: 1980
Screen Size:	1m (w) x 2m(h) - 2m(w) x 2m(h) 3m(w) x 2m(h) - 1m(w) x 2.6m(h) 2m(w) x 2.6(h) 3m(w) x 2.6(h)
T-bar Width (base plate):	500mm
Standard Screen Colours:	Red, Yellow, Blue, Green
Floor Clearance (bottom gap)	90mm

This fact sheet is for illustrative purposes only and based on the latest information at the time of print. Installation methods may vary depending on specific project requirements. Westgate Global reserve the right to make changes at any time without notice.

J522-WFD-PFS-FC-010323 © Westgate Global Ltd