


Hoardfast® is a **quick-to-install, modular, free-standing or floor-to-ceiling** (up to 5m) internal **partitioning and screening system** that can be used as a temporary screen, permanent partition wall or to create internal rooms.

Ideal for use in construction, fit-out and refurbishment projects, and sectioning/isolating areas to control access, noise and dust.

Available in a **range of panel types (including sound reduction and fire protection)**, **support** and **stability options**.



Floor-To-Ceiling
or Free-Standing



Range of
Panel Types



Quick Modular
Installation




Choose Self or
Service Installation



Hire or Purchase
Options




Express
Delivery

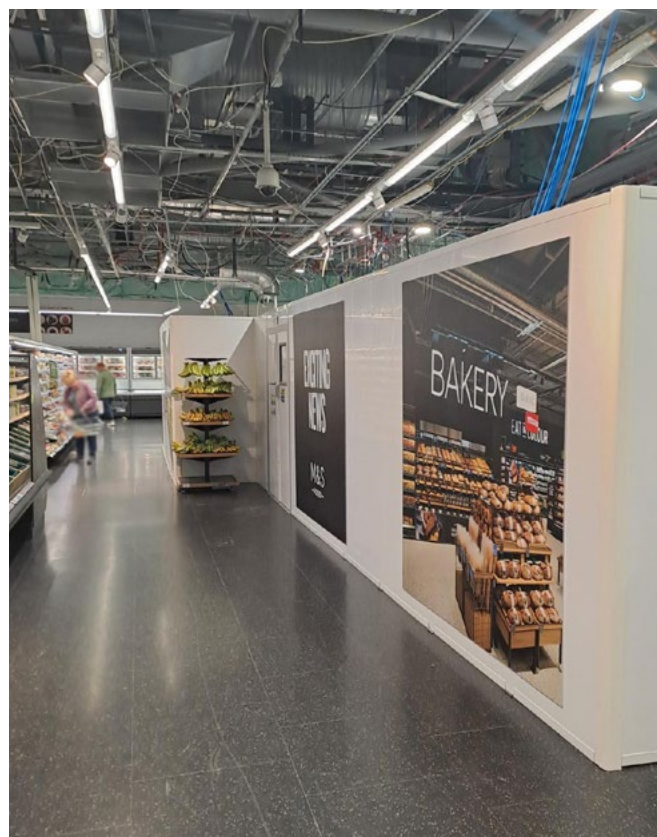


Features and Benefits

Modular ready to install system	• Quick-to-install for minimal disruption to business schedules • Available for self-installation or installation by Westgate Global • Easy to configure as required (can be cut down easily) • Create temporary or semi-permanent partitions, screens and rooms with ease
Range of panel types and support / stability options	• 30 minute and 60 minute fire rated panels installed floor-to-ceiling for fire-rated protection • Sound reduction panel up to 34dB • Support and stability options when crowd loading applies
Access points	• Single or double uPVC access doors • Quick to install, remove and reuse
Reusable and relocatable sustainable system	• Made from 85% recycled plastic, and recycled at end of life • Install, demount and reuse multiple times • Reduce waste and environmental impact on projects
Express delivery	• Speedy delivery directly to site • Large UK stock
Cost effective option	• Hire or purchase • Pricing to suit your budget and project requirements


Installation

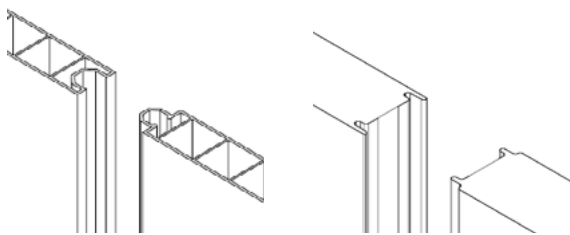

Tongue and groove system for quick and easy installation.

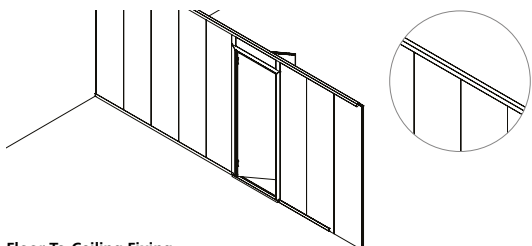


Floor-To-Ceiling Fixing
U-Channel Top and Bottom

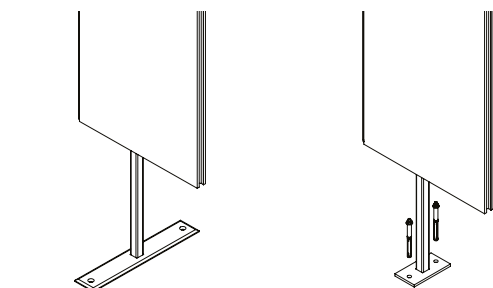

Free-Standing
Equal

Free-Standing
Bolt Down

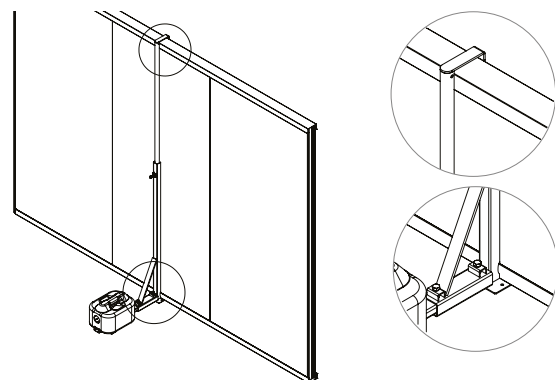

Free-Standing
Universal Support

Floor-to-ceiling or free-standing support options with high stability support available.

This fact sheet is for illustrative purposes only and based on the latest information at the time of print. Installation methods may vary depending on specific project requirements. Westgate Global reserve the right to make changes at any time without notice.

J230-WFD-PFS-HF-I-1125 © Westgate Global Ltd

Hordfast® is available as a standard uPVC hollow fluted panel, steel faced PIR foam filled panel, or mineral wool filled panel. Different system specifications are capable of achieving up to 1-hour fire retardancy and sound reduction up to 34dB.

Technical Specification

Material Composite	85% uPVC, hollow fluted or steel faced with either fire rated PIR foam or mineral wool filled
Panel Fire Rating	uPVC hollow flute: BS476 Part 7 Class 1 (Spread of Flame) and EN13501-1 C s3 d0 (35mm profile only) Steel fire rated PIR foam filled: EN13501-1 B s1 d0 Steel mineral wool filled: EN 13501-1:2008 A2 s1 d0 fire class rating and EI30/EI60 fire resistance
Panel Weights	between 8.00 / m ² – 17.9 / m ²
Panel Heights	between 1.12m – 5.00m
Panel Width	between 0.5m - 1m
Panel Depth	between 30mm – 80mm
Support Options	Floor-to-ceiling; supplied with u-channel fixings, Free-standing; bolt down, equal, offset weighted and universal

