Hoardfast® PVC *hoarding*

Protectors of *momentum*

Hoardfast® PVC is a temporary, lightweight and quick-to-install, internal hoarding panel. During fit out, refurbishment and maintenance projects, create temporary hoarding barriers to segregate live areas from active works, or construct new temporary areas. For projects where external site accommodation is not an option, build internal site rooms and welfare spaces directly in the project zone. Easily demount and relocate our modular system during phased works.

Quick-to-install

Free-standing or floor-to-ceiling fix

Relocate and reuse

Recyclable and sustainable

Hire or purchase*

Express delivery

Features and benefits	
Modular, quick-to-install panel system	• Quick to configure, demount and relocate – save valuable set up time on site
Bright white PVC panel	• Smart appearance – fits seamlessly into any environment • Easy to clean – wipeable and hygienic • Easily apply vinyl graphics – enhance customer/worker experience
Lightweight hollow fluted panel design	• Easy to lift and move around site • Simple to cut around complex structures or service pipes
Tongue and groove panel connection method	• Tight seal to prevent contamination/dust spread and reduce noise transmission – improving safety in live environments.
Sustainable – reusable and recyclable panel	• Reuse panels and components on phased or multiple projects • Made from 85% recycled PVC • Panel recyclable at end of useable life • Reduce overall environmental impact of your project
Graded panel options (35mm profile only)	• Choose A, B or C grade – price of panel to suit your project
Various support and stability options	• Choose the stability support option to suit your project requirements • Create floor-to-ceiling or part-height free-standing walls and rooms • Free-standing support prevents floor damage
Range of panel heights and thickness options	• Choose panel thickness and height to meet project needs
Range of components and accessories	• Use corner posts and T-sections to create perpendicular walls • Easy fit single and double doors (with digilock) – prevent unauthorised access • Includes vision panels or windows – for effective line of sight
Hire and supply only options	• Hire – use the hoarding only for the time you need • Supply only – use your own labour to install, or book our experienced installation team
Express delivery	• Warehouse stock – get items on site quickly to prevent delays

Technical specifications

Panel performance	
Panel composite	85% recycled PVC, 15% Virgin uPVC, grey hollow fluted internal and solid white micro ridged external face
Panel connection method	Tongue and groove
Panel fire rating	BS 476 Part 7 Class 1 (Spread of Flame) and EN 13501-1 C-s3-d0 (35mm only)
Sound reduction	Up to 27dB
Thermal insulation (U-value)	2.95 W/m²K (35mm profile) 2.43 W/m²K (50mm profile) (*Theoretically calculated)
Panel heights	Free-standing: 1.12m, 2.25m, 2.7m, 3m Floor-to-ceiling: 4m, 5m (Panels can be cut to required height)
Panel width	500mm
Panel thickness	35mm (up to 2.7m), 50mm (3m-5m)
Support options	Floor-to-ceiling: supplied with u-channel fixings Free-standing: equal, offset, universal, bolt down

Hoardfast® PVC panels and components are dispatched using an express delivery service directly from our warehouse. Our Hoardfast range also includes Soundscreen (sound reduction hoarding) and Firescreen (30 and 60 minute fire rated) panel options.

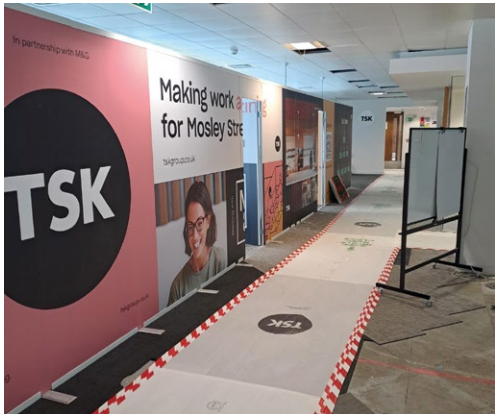

This fact sheet is for illustrative purposes only and based on the latest information at the time of print. Installation methods may vary depending on specific project requirements. Westgate Global reserve the right to make changes at any time without notice.
WG-PFS-HFT-PVC-0126 © Westgate Global Ltd.

Installation



Panels are connected by knocking together the tongue and groove joints, to create a seamless, flush, durable and secure connection.

Free-standing equal



Free-standing offset



Free-standing bolt down



Free-standing universal



Hoardfast PVC works with a range of free-standing stability options, or install floor-to-ceiling using supplied u-channels.

Floor-to-ceiling u-channel top and bottom