

Hoardfast® Soundscreen *hoarding*

Hoardfast® Soundscreen is a temporary, quick-to-install, acoustic hoarding panel. Reduce the impacts of noise and prevent dust spread from internal fit out and refurbishment projects. Create temporary hoarding barriers to segregate live areas from active works, or build internal site rooms directly in the project zone. Manufactured from materials with limited combustibility, Soundscreen is perforated to one side to absorb noise and provides up to 34dB sound reduction when installed floor-to-ceiling. Easily demount and relocate our modular system during phased works.



Features and benefits	
Modular, quick-to-install panel system	<ul style="list-style-type: none"> • Quick to configure, demount and relocate – save valuable set up time on site
White steel faced, mineral wool filled panel, perforated to one side	<ul style="list-style-type: none"> • Certified up to 34dB sound reduction when installed floor-to-ceiling • Limited combustibility – certified to EN 13501-1 A2-s1-d0 • Smart appearance – fits seamlessly into any environment • Easily apply vinyl graphics – enhance customer/worker experience • Panels can be cut to fit around protrusions – to ensure sound/dust tight seal
Tongue and groove panel connection method	<ul style="list-style-type: none"> • Tight seal to prevent contamination/dust spread and reduce noise transmission – improving safety in live environments
Reusable and relocatable	<ul style="list-style-type: none"> • Reuse panels and components on phased or multiple projects • Reduce overall environmental impact of your project
Multiple panel heights and stability options	<ul style="list-style-type: none"> • Create floor-to-ceiling or part-height free-standing walls and rooms • Choose panel height and stability support to meet project needs • Panel cutting service available on request • Free-standing universal support prevents floor damage • Stability calculations for crowd loading / temporary works can be provided on request
Range of components / accessories	<ul style="list-style-type: none"> • Use corner posts and T-sections to create perpendicular walls • Easy fit single and double doors (with digilock) – prevent unauthorised access • Include vision panels or windows – for effective line of sight
Hire and installation options	<ul style="list-style-type: none"> • Free-standing universal support is available to hire – use the supports only for the time you need • Supply only – use your own labour to install, or book our experienced installation team
Express delivery	<ul style="list-style-type: none"> • Warehouse stock – get items on site quickly to prevent delays




*Part-height free-standing systems do not offer the same level of acoustic reduction as floor-to-ceiling.


Technical specifications

Panel performance	
Panel composite	White steel faced mineral wool filled (perforated to construction side)
Panel connection method	Tongue and groove push fit
Panel fire rating	EN 13501-1 A2-s1-d0 (limited combustibility)
Sound reduction	Up to 34dB
Thermal insulation (U-Value)	0.75 W/m ² K
Panel heights	2.7m, 4m (panels can also be cut to order on request)
Panel width	1m
Panel thickness	50mm
Panel weight	14.5 kg/m ²
Support options	Floor-to-ceiling: supplied with u-channel fixings Free-standing: universal

Our Soundscreen panel is only available to purchase. The universal support is available to hire. Panels and components are dispatched using an express delivery service directly from our warehouse. The Hoardfast® range also includes a PVC panel (available for hire), and 30 and 60 minute fire rated panels (Firescreen).

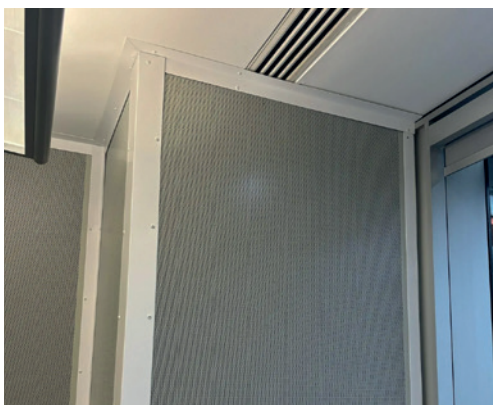


Installation

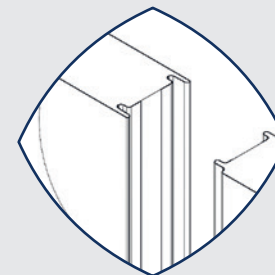


The panels tongue and groove joints push together to create a seamless, flush, durable and secure connection.

**Floor-to-ceiling fixing
u-channel top and bottom**

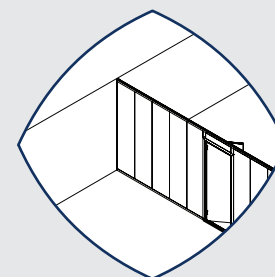

**Free-standing
universal support**

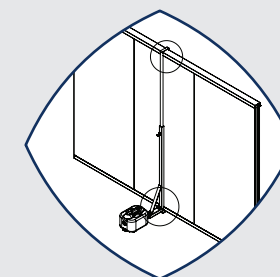

Soundscreen can be installed floor-to-ceiling using supplied u-channels or for a free-standing system choose our universal support, which can hold 1 - 6 16kg weights.

This fact sheet is for illustrative purposes only and based on the latest information at the time of print. Installation methods may vary depending on specific project requirements. Westgate Global reserve the right to make changes at any time without notice. WG-PFS-HFT-SS-0126 © Westgate Global Ltd.